

Practitioner's Docket No.: 081468-0306523
Client Reference No.: P-0371.010-US

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Confirmation No:

VAN DER WERF et al.

Application No.: TO BE ASSIGNED

Group No.:

Filed: October 27, 2003

Examiner:

For: A METHOD OF DETECTING MASK DEFECTS, A COMPUTER PROGRAM
AND A REFERENCE SUBSTRATE

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

SUBMISSION OF PRIORITY DOCUMENT


Attached please find the certified copy of the foreign application from which priority is claimed for this case:

<u>Country</u>	<u>Application Number</u>	<u>Filing Date</u>
EUROPE	02257465.1	10/28/2002

Date: October 27, 2003

PILLSBURY WINTHROP LLP
P.O. Box 10500
McLean, VA 22102
Telephone: (703) 905-2000
Facsimile: (703) 905-2500

Customer Number: 00909



Emily T. Bell
Registration No. 47418



**Europäisches
Patentamt**

**Eur pean
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02257465.1

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 02257465.1
Demande no:

Anmeldetag:
Date of filing: 28.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

ASML Netherlands B.V.
De Run 1110
5503 LA Veldhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

A method of detecting mask defects, a computer program and a reference substrate

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G03F/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

A Method of Detecting Mask Defects, a Computer Program and a Reference Substrate

The present invention relates to a method of detecting errors in patterning means used in photolithographic apparatus comprising:

- a radiation system for supplying a projection beam of radiation;
- a support structure for supporting patterning means, the patterning means serving to
5 pattern the projection beam according to a desired pattern;
- a substrate table for holding a substrate; and
- a projection system for projecting the patterned beam onto a target portion of the substrate.

10

The term "patterning means" as here employed should be broadly interpreted as referring to means that can be used to endow an incoming radiation beam with a patterned cross-section, corresponding to a pattern that is to be created in a target portion of the substrate; the term "light valve" can also be used in this context. Generally,
15 the said pattern will correspond to a particular functional layer in a device being created in the target portion, such as an integrated circuit or other device (see below). Examples of such patterning means include:

20

25

- A mask. The concept of a mask is well known in lithography, and it includes mask types such as binary, alternating phase-shift, and attenuated phase-shift, as well as various hybrid mask types. Placement of such a mask in the radiation beam causes selective transmission (in the case of a transmissive mask) or reflection (in the case of a reflective mask) of the radiation impinging on the mask, according to the pattern on the mask. In the case of a mask, the support structure will generally be a mask table, which ensures that the mask can be held at a desired position in the incoming radiation beam, and that it can be moved relative to the beam if so desired.
- A programmable mirror array. One example of such a device is a matrix addressable surface having a viscoelastic control layer and a reflective surface. The

basic principle behind such an apparatus is that (for example) addressed areas of the reflective surface reflect incident light as diffracted light, whereas unaddressed areas reflect incident light as undiffracted light. Using an appropriate filter, the said undiffracted light can be filtered out of the reflected beam, leaving only the

5 diffracted light behind; in this manner, the beam becomes patterned according to the addressing pattern of the matrix-addressable surface. An alternative embodiment of a programmable mirror array employs a matrix arrangement of tiny mirrors, each of which can be individually tilted about an axis by applying a suitable localized electric field, or by employing piezoelectric actuation means.

10 Once again, the mirrors are matrix-addressable, such that addressed mirrors will reflect an incoming radiation beam in a different direction to unaddressed mirrors; in this manner, the reflected beam is patterned according to the addressing pattern of the matrix-addressable mirrors. The required matrix addressing can be performed using suitable electronic means. In both of the situations described

15 hereabove, the patterning means can comprise one or more programmable mirror arrays. More information on mirror arrays as here referred to can be gleaned, for example, from United States Patents US 5,296,891 and US 5,523,193, and PCT patent applications WO 98/38597 and WO 98/33096, which are incorporated herein by reference. In the case of a programmable mirror array, the said support structure

20 may be embodied as a frame or table, for example, which may be fixed or movable as required.

A programmable LCD array. An example of such a construction is given in United States Patent US 5,229,872, which is incorporated herein by reference. As above, the support structure in this case may be embodied as a frame or table, for example,

25 which may be fixed or movable as required.

For purposes of simplicity, the rest of this text may, at certain locations, specifically direct itself to examples involving a mask and mask table; however, the general principles discussed in such instances should be seen in the broader context of the patterning means as hereabove set forth.

30 Lithographic projection apparatus can be used, for example, in the manufacture of integrated circuits (ICs). In such a case, the patterning means may generate a circuit pattern corresponding to an individual layer of the IC, and this pattern can be

imaged onto a target portion (e.g. comprising one or more dies) on a substrate (silicon wafer) that has been coated with a layer of radiation-sensitive material (resist). In general, a single wafer will contain a whole network of adjacent target portions that are successively irradiated via the projection system, one at a time. In current apparatus, employing patterning by a mask on a mask table, a distinction can be made between two different types of machine. In one type of lithographic projection apparatus, each target portion is irradiated by exposing the entire mask pattern onto the target portion in one go; such an apparatus is commonly referred to as a wafer stepper. In an alternative apparatus — commonly referred to as a step-and-scan apparatus — each target portion is irradiated by progressively scanning the mask pattern under the projection beam in a given reference direction (the "scanning" direction) while synchronously scanning the substrate table parallel or anti-parallel to this direction; since, in general, the projection system will have a magnification factor M (generally < 1), the speed V at which the substrate table is scanned will be a factor M times that at which the mask table is scanned. More information with regard to lithographic devices as here described can be gleaned, for example, from US 6,046,792, incorporated herein by reference.

In a manufacturing process using a lithographic projection apparatus, a pattern (e.g. in a mask) is imaged onto a substrate that is at least partially covered by a layer of radiation-sensitive material (resist). Prior to this imaging step, the substrate may undergo various procedures, such as priming, resist coating and a soft bake. After exposure, the substrate may be subjected to other procedures, such as a post-exposure bake (PEB), development, a hard bake and measurement/inspection of the imaged features. This array of procedures is used as a basis to pattern an individual layer of a device, e.g. an IC. Such a patterned layer may then undergo various processes such as etching, ion-implantation (doping), metallization, oxidation, chemo-mechanical polishing, etc., all intended to finish off an individual layer. If several layers are required, then the whole procedure, or a variant thereof, will have to be repeated for each new layer. Eventually, an array of devices will be present on the substrate (wafer). These devices are then separated from one another by a technique such as dicing or sawing, whence the individual devices can be mounted on a carrier, connected to pins, etc. Further information regarding such processes can be obtained, for example, from the book "Microchip Fabrication: A Practical

Guide to Semiconductor Processing", Third Edition, by Peter van Zant, McGraw Hill Publishing Co., 1997, ISBN 0-07-067250-4, incorporated herein by reference.

For the sake of simplicity, the projection system may hereinafter be referred to as the "lens"; however, this term should be broadly interpreted as encompassing various types of projection system, including refractive optics, reflective optics, and catadioptric systems, for example. The radiation system may also include components operating according to any of these design types for directing, shaping or controlling the projection beam of radiation, and such components may also be referred to below, collectively or singularly, as a "lens". Further, the lithographic apparatus may be of a type having two or more substrate tables (and/or two or more mask tables). In such "multiple stage" devices the additional tables may be used in parallel, or preparatory steps may be carried out on one or more tables while one or more other tables are being used for exposures. Dual stage lithographic apparatus are described, for example, in US 5,969,441 and WO 98/40791, incorporated herein by reference.

Defects in the mask, or mask pattern can result in defective devices, such as ICs, and are therefore undesirable. Mask defects typically fall into three categories. Firstly, contamination, such as dirt or stains, on a transparent or reflective part of the mask can block and/or distort exposing radiation and print onto the substrate as though it were a part of the pattern. Secondly, cracks in the mask material (e.g. quartz) can block or scatter radiation, therefore causing distorted images. Thirdly, pattern distortions in the mask manufacturing process may occur. These distortions include pinholes, chrome spots, pattern extensions, missing parts, breaks in the pattern and bridges between adjacent patterns. Of the three sources of defects, contamination is the most prevalent and to minimize the possibility of contamination the mask is usually kept in clean conditions during use. Often pellicles are also used on a mask to minimize or eliminate contaminants on the mask after the pellicle is installed.

To avoid manufacturing defective devices, a defective mask should be detected as soon as possible so that it can be repaired or replaced. Conventionally, when a defect in the mask and/or mask pellicle is suspected or as part of maintenance, the mask is removed from the lithographic apparatus and examined. If the mask and/or pellicle is undamaged the mask is returned to the apparatus and production continues. If the mask and/or pellicle is damaged, the mask and/or pellicle is repaired or replaced and then

returned to the lithographic apparatus. However, in removing a mask from the lithographic apparatus, the mask and pellicle are subjected to increased probabilities of contamination and/or damage. Additionally, in checking for defects, production of devices will slow or cease and it is therefore advantageous for inspection and examination to be as fast as possible, without compromising accuracy.

It is an object of the present invention to provide an improved method of detecting defects in patterning means.

This and other objects are achieved according to the invention in a method of detecting defects in a patterning means comprising:

using patterning means in a photolithographic process to print a reference pattern on a reference substrate;

using the patterning means in a photolithographic process to expose a pattern for manufacture of a device on a production substrate different from said reference substrate;

using the patterning means in a photolithographic process to print a test pattern on a test substrate; and

comparing the printed test pattern to the printed reference pattern to detect a defect in the patterning means.

20

As exposure of a patterning means can take place with the patterning means in situ i.e. in clean conditions in the lithographic apparatus, the patterning means is no longer subjected to increased possibility of contamination or damage through removal and replacement. Furthermore, because the patterning means (e.g. the mask) does not need to be removed from the clean conditions unnecessarily, device throughput is virtually unaffected. Exposure of a test substrate takes the same time as exposure of a production substrate and any further inspection of the test substrate can take place while production continues.

Methods of photolithography are well developed and so the inventors have found a substrate comprising a silicon wafer with a layer of SiO_2 to be a good reference substrate. A wafer with a nitride layer can also be a good reference substrate. As will be apparent to those skilled in the art, other materials can be used, for example to yield an

accurate pattern with strong contrast. Photolithographic methods used to manufacture devices can then be employed and a highly accurate pattern etched into the SiO₂ or other layer.

5 To avoid contamination, both the reference substrate and the patterning means should be stored in clean conditions. According to an embodiment of the invention, the patterning means need only be removed from clean conditions when a defect is detected.

For convenient comparison, the test substrate can be the reference substrate. In particular, the test substrate is patterned by exposing a layer of radiation sensitive material (resist). Once the test substrate has been scanned, the resist can be removed, and
10 the test substrate reused.

The reference pattern is preferably printed at a plurality of different locations on the reference substrate, with sufficient space between each reference pattern to allow individual test patterns to be printed beside each of the reference patterns.

15 In order to compare a reference pattern and a test pattern, the patterned test substrate and reference substrate can be scanned by at least one optical defect inspection tool, possibly simultaneously. The optical defect inspection tool could be, for example, a microscope or a system using Scanning Electron Microscopy, such as KLA inspection systems (e.g. KLA-Tencor's 2139 system or KLA-Tencor's ES20 series). Multiple
20 comparisons between reference and test patterns may be performed and majority voting can determine the location of the defect.

According to a further aspect of the invention there is provided an inspection system comprising:

means for inspecting first and second patterns; and
25 means for comparing said first and second patterns.

The means for inspecting first and second patterns preferably comprises two inspection tools capable of inspecting said first and second patterns simultaneously.

According to a further aspect of the invention there is provided a computer program comprising program code means for instructing a lithographic projection
30 apparatus to use patterning means to print a reference pattern on a reference substrate and, at a later time, to use said patterning means to print a test pattern on the same reference substrate.

According to a further aspect of the invention there is provided a computer program comprising program code means for instructing an inspection system to inspect first and second patterns and to compare said first and second patterns.

According to yet a further aspect of the invention there is provided a
5 reference substrate comprising a substrate having thereon a durable printed reference image of a pattern of a patterning means and no further patterned layers above said reference image.

As used herein, the terms "print" and "printed" comprise exposure. Those terms may also comprise exposure and development of a resist or exposure, development
10 of a resist and etching. Although specific reference may be made in this text to the use of the apparatus according to the invention in the manufacture of ICs, it should be explicitly understood that such an apparatus has many other possible applications. For example, it may be employed in the manufacture of integrated optical systems, guidance and detection patterns for magnetic domain memories, liquid-crystal display panels, thin-film magnetic
15 heads, etc. The skilled artisan will appreciate that, in the context of such alternative applications, any use of the terms "reticle", "wafer" or "die" in this text should be considered as being replaced by the more general terms "mask", "substrate" and "target portion", respectively.

In the present document, the terms "radiation" and "beam" are used to
20 encompass all types of electromagnetic radiation, including ultraviolet radiation (*e.g.* with a wavelength of 365, 248, 193, 157 or 126 nm) and EUV (extreme ultra-violet radiation, *e.g.* having a wavelength in the range 5-20 nm), as well as particle beams, such as ion beams or electron beams.

25
Embodiments of the invention will now be described, by way of example only, with reference to the accompanying schematic drawings in which:

Figure 1 depicts a lithographic projection apparatus according to an
30 embodiment of the invention;

Figure 2 depicts an arrangement of reference patterns and test patterns on a combined reference substrate and test substrate; and

Figure 3 is a flow diagram of a method of testing for a defect in patterning means according to an embodiment of the invention.

In the Figures, corresponding reference symbols indicate corresponding parts.

5

Figure 1 schematically depicts a lithographic projection apparatus which is used in the invention. The apparatus comprises:

- a radiation system Ex, IL, for supplying a projection beam PB of radiation (*e.g.* EUV radiation), which in this particular case also comprises a radiation source LA;
- a first object table (mask table) MT provided with a mask holder for holding a mask MA (*e.g.* a reticle), and connected to first positioning means for accurately positioning the mask with respect to item PL;
- a second object table (substrate table) WT provided with a substrate holder for holding a substrate W (*e.g.* a resist-coated silicon wafer), and connected to second positioning means for accurately positioning the substrate with respect to item PL;
- a projection system ("lens") PL (*e.g.* a refractive lens system group) for imaging an irradiated portion of the mask MA onto a target portion C (*e.g.* comprising one or more dies) of the substrate W;
- an inspection system IS.

As here depicted, the apparatus is of a transmissive type (*e.g.* has a transmissive mask). However, in general, it may also be of a reflective type, for example (*e.g.* with a reflective mask). Alternatively, the apparatus may employ another kind of patterning means, such as a programmable mirror array of a type as referred to above.

The source LA (*e.g.* a laser-produced or discharge plasma source) produces a beam of radiation. This beam is fed into an illumination system (illuminator) IL, either directly or after having traversed conditioning means, such as a beam expander Ex, for example. The illuminator IL may comprise adjusting means AM for setting the outer and/or inner radial extent (commonly referred to as σ -outer and σ -inner, respectively) of the intensity distribution in the beam. In addition, it will generally comprise various other

30

components, such as an integrator IN and a condenser CO. In this way, the beam PB impinging on the mask MA has a desired uniformity and intensity distribution in its cross-section.

It should be noted with regard to Figure 1 that the source LA may be within the housing of the lithographic projection apparatus (as is often the case when the source LA is a mercury lamp, for example), but that it may also be remote from the lithographic projection apparatus, the radiation beam which it produces being led into the apparatus (e.g. with the aid of suitable directing mirrors); this latter scenario is often the case when the source LA is an excimer laser. The current invention and claims encompass both of these scenarios.

The beam PB subsequently intercepts the mask MA, which is held on a mask table MT. Having traversed by the mask MA, the beam PB passes through the lens PL, which focuses the beam PB onto a target portion C of the substrate W. With the aid of the second positioning means (and interferometric measuring means IF), the substrate table WT can be moved accurately, e.g. so as to position different target portions C in the path of the beam PB. Similarly, the first positioning means can be used to accurately position the mask MA with respect to the path of the beam PB, e.g. after mechanical retrieval of the mask MA from a mask library, or during a scan. In general, movement of the object tables MT, WT will be realized with the aid of a long-stroke module (course positioning) and a short-stroke module (fine positioning), which are not explicitly depicted in Figure 1. However, in the case of a wafer stepper (as opposed to a step-and-scan apparatus) the mask table MT may just be connected to a short stroke actuator, or may be fixed.

The depicted apparatus can be used in two different modes:

1. In step mode, the mask table MT is kept essentially stationary, and an entire mask image is projected at once (*i.e.* a single "flash") onto a target portion C. The substrate table WT is then shifted in the x and/or y directions so that a different target portion C can be irradiated by the beam PB;

2. In scan mode, essentially the same scenario applies, except that a given target portion C is not exposed in a single "flash". Instead, the mask table MT is movable in a given direction (the so-called "scan direction", e.g. the y direction) with a speed v , so that the projection beam PB is caused to scan over a mask image; concurrently, the substrate table WT is simultaneously moved in the same or opposite direction at a speed $V = Mv$, in

which M is the magnification of the lens PL (typically, $M = 1/4$ or $1/5$). In this manner, a relatively large target portion C can be exposed, without having to compromise on resolution.

5 A mask is assumed undamaged and clean when first installed in a lithographic apparatus and according to this embodiment of the present invention a reference substrate 10 is printed after installation of the mask by exposing a pattern of the mask onto the reference place. The reference substrate is printed substantially directly after installation of the mask. The reference substrate 10 provides an "idealized" pattern with
10 which to compare future possibly defective patterns. In this embodiment the reference substrate 10 is formed from a silicon substrate with an outer layer of SiO_2 of known purity and thickness. The substrate is coated with a resist. To print the reference substrate 10, the mask, already installed in the lithographic apparatus but not yet used in the production of devices such as ICs, is used to pattern a projection beam to expose the resist. As shown in
15 Figure 2, one or more substantially identical reference patterns $R_1, R_2, R_3, R_4, \dots$ are exposed spaced apart. The resist material is developed to reveal the SiO_2 beneath, which is then etched, e.g. using hydrofluoric acid. When the remaining resist is removed the pattern(s) is/are revealed as an etched pattern(s) in the SiO_2 . The reference substrate 10 is then kept in clean conditions until it is needed.

20 When, for example, a defect is suspected, the reference substrate 10 is coated in resist, step S1. In step S2 the mask patterns the projection beam to expose the resist in order to print substantially identical test patterns, $T_1, T_2, T_3, T_4, \dots$ on the reference/test substrate next to the reference patterns $R_1, R_2, R_3, R_4, \dots$. After developing the resist and etching the exposed SiO_2 in step S3, the reference pattern and the test pattern of
25 each pair are scanned by one or more respective microscopes simultaneously or in sequence in step S4. Depending on the resist type, the layer stack etc. the sensitivity of the microscope, or other inspection tool, is adjusted to obtain the highest contrast in the reference and test patterns. Meanwhile the lithographic apparatus can continue production. In S5 and S6 the results of the scans of T_1 and R_1 are considered to see if they are identical.
30 If they are not identical there may be a defect in the mask, or alternatively there may be a random error in the single exposure of pattern T_1 or R_1 . T_2 and R_2 may therefore be compared and if these are identical then it is assumed the difference between T_1 and R_1 was

due to a random error and the mask is defect free. If T_2 and R_2 are not identical T_3 and R_3 and T_4 and R_4 etc. can be compared. Majority voting can be employed with respect to the comparisons of T_1 and R_1 , T_2 and R_2 , T_3 and R_3 etc. to determine if there is a defect. If a defect is present, T_1 and R_1 can be scanned in more detail to determine the exact location of the defect, by determining which small area of T_1 and R_1 is non-identical. In step S7 the mask is removed from the apparatus and cleaned, repaired or replaced if a defect is suspected. The reference/test substrate can be reused by printing test patterns T_1 , T_2 , T_3 , T_4 ... on different locations adjacent or near to the reference patterns R_1 , R_2 , R_3 , R_4 The reference substrate 10 is returned to storage in clean conditions.

The above system is configured using a computer which uses details such as the pattern layout, layer stack and resist type to optimize the system. Furthermore the computer program may manage the arrangement of reference and test patterns on the reference and test substrates respectively.

In the above embodiments, the reference substrate 10 is the test substrate, but the invention is not limited to this, and the reference and test substrates can be different. Where the reference substrate and test substrate are different substrates, the reference substrate is printed with one or more reference patterns R_1 , R_2 , R_3 , etc. This reference substrate is then used for comparison with one or more test substrates. A separate test substrate is then printed for comparison with the reference substrate. When comparison is complete, the resist on the test substrate can be stripped so that the test substrate can be reused for additional test patterns.

In the above embodiment, the reference and test substrate have been exposed, developed and etched before scanning by a microscope. Optionally, the reference and test substrates may also simply be exposed or exposed and developed, particularly where the reference and test substrate are different substrates. Alternatively, a surface other than SiO_2 which would give a pattern with good contrast could be used. The inventors have found a layer of nitride on the silicon to be particularly good.

In an embodiment, the patterning means is an EUV mask, such as a reflective mask.

While specific embodiments of the invention have been described above, it will be appreciated that the invention may be practiced otherwise than as described. The description is not intended to limit the invention.

CLAIMS:

1. A method of detecting defects in a patterning means comprising:
using patterning means in a photolithographic process to print a reference pattern on a reference substrate;
using the patterning means in a photolithographic process to expose a pattern for
5 manufacture of a device on a production substrate different from said reference substrate;
using the patterning means in a photolithographic process to print a test pattern on a test substrate; and
comparing the printed test pattern to the printed reference pattern to detect a defect in the patterning means.

10 2. A method of detecting defects in a patterning means according to any one of the preceding claims wherein the reference substrate is a silicon wafer.

3. A method of detecting defects in a patterning means according to any one of the preceding claims wherein the reference substrate is a silicon wafer having an SiO₂ layer and the printed reference pattern is etched into the SiO₂ layer.

15 4. A method of detecting defects in a patterning means according to any one of the preceding claims wherein the test substrate is the reference substrate.

5. A method of detecting defects in a patterning means according to any one of the preceding claims wherein the printed test pattern is a pattern in developed resist.

6. A method of detecting defects in a patterning means according to any one of
20 the preceding claims wherein the reference pattern is printed at a plurality of different locations on the reference substrate.

7. A method of detecting defects in a patterning means according to claim 6 wherein individual printed reference patterns are spaced such that an individual test pattern can be printed beside each individual printed reference pattern


25 8. A method of detecting defects in a patterning means according to any one of the preceding claims wherein in comparing the printed test pattern to the printed reference pattern the patterned test substrate and reference substrate are scanned by at least one optical defect inspection tool.

9. A method of detecting defects in a patterning means according to claim 8 wherein in comparing the printed test pattern to the printed reference pattern the patterned test substrate and reference substrate are scanned simultaneously by respective optical defect inspection tools.
- 5 10. A method of detecting defects in a patterning means according to either claim 8 or claim 9 wherein multiple comparisons take place between multiple printed reference patterns and multiple printed test patterns.
11. A method of detecting defects in a patterning means according to claim 10 wherein majority voting determines location of the defect in the patterning means.
- 10 12. A method of detecting defects in a patterning means according to any one of the preceding claims wherein said patterning means is a photolithography mask.
13. An inspection system comprising:
means for inspecting first and second patterns; and
means for comparing said first and second patterns.
- 15 14. An inspection system according to claim 13 wherein said means for inspecting first and second patterns comprises two inspection tools capable of inspecting said first and second patterns simultaneously.
15. A computer program comprising program code means for instructing a lithographic projection apparatus to use patterning means to print a reference pattern on a
20 reference substrate and, at a later time, to use said patterning means to print a test pattern on the same reference substrate.
16. A computer program comprising program code means for instructing an inspection system to inspect first and second patterns and to compare said first and second patterns.
- 25 17. A reference substrate comprising a substrate having thereon a durable printed reference image of a pattern of a patterning means and no further patterned layers above said reference image.
18. A reference substrate according to claim 13 wherein said printed reference image has been formed by etching into a layer of SiO_2 on the substrate.
- 30 19. A reference substrate according to either claim 13 or claim 14 wherein the pattern is printed at a number of different locations on the reference substrate.
20. A reference substrate according to claim 15 wherein the individual printed

P-0371-000

-14-

patterns are spaced such that an individual test pattern can be printed beside each individual printed reference pattern.

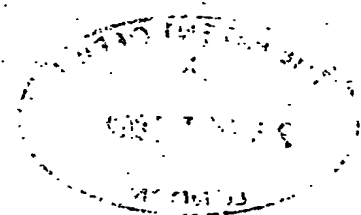

ABSTRACT**A Method of Detecting Mask Defects, a Computer Program and a Reference Substrate**

A method of detecting mask defects in which a reference substrate is patterned by the mask immediately after manufacture of the mask. The reference substrate is stored in clean conditions while IC manufacture takes place. When a mask defect is suspected a resist coated substrate, the test substrate, is patterned by exposure of the mask. The patterns on
5 the reference substrate and the test substrate are compared to determine if there is a mask defect. The location of the mask defect can be found by scanning smaller areas of the patterns.

Fig. 2



Fig. 1

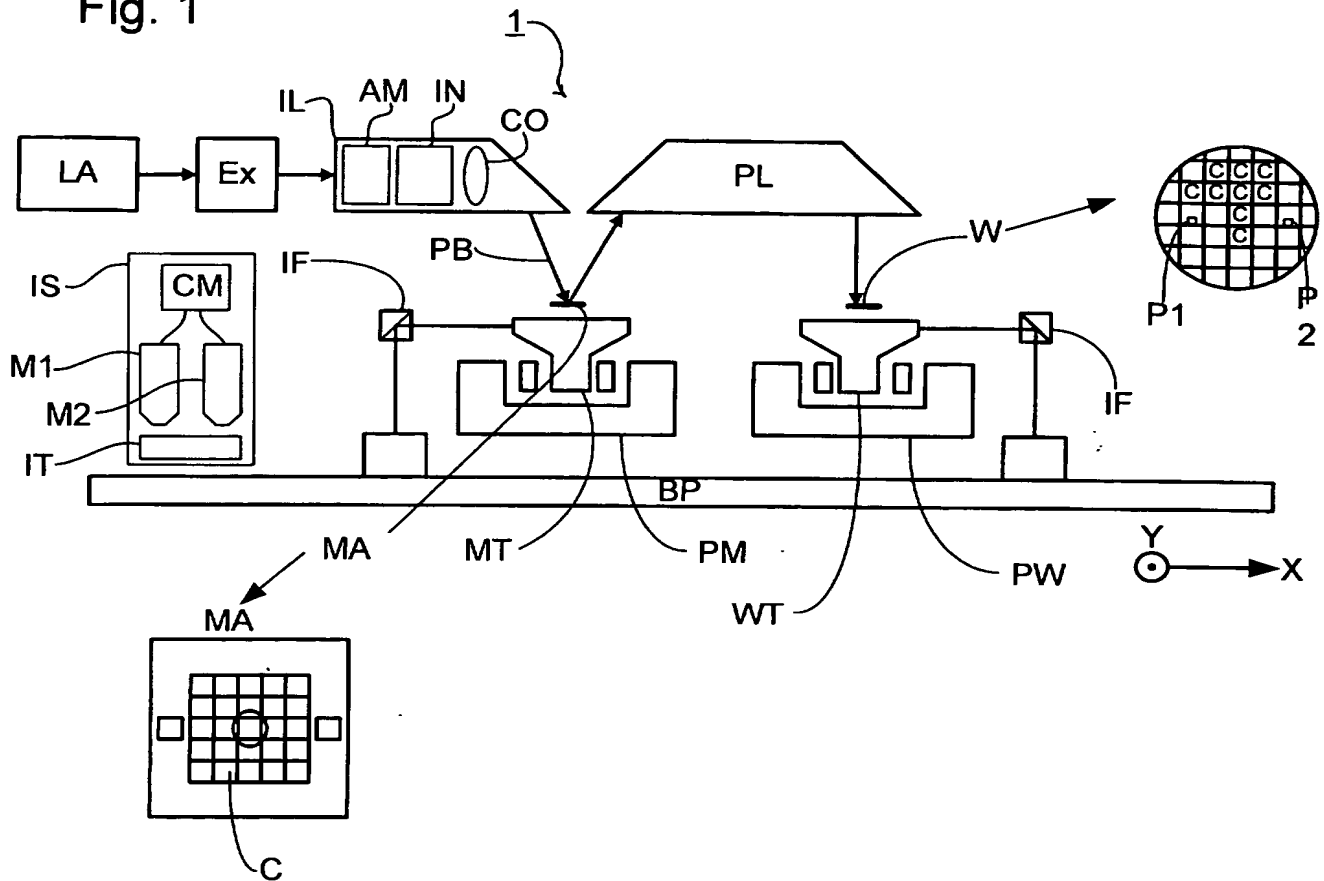


Fig. 2

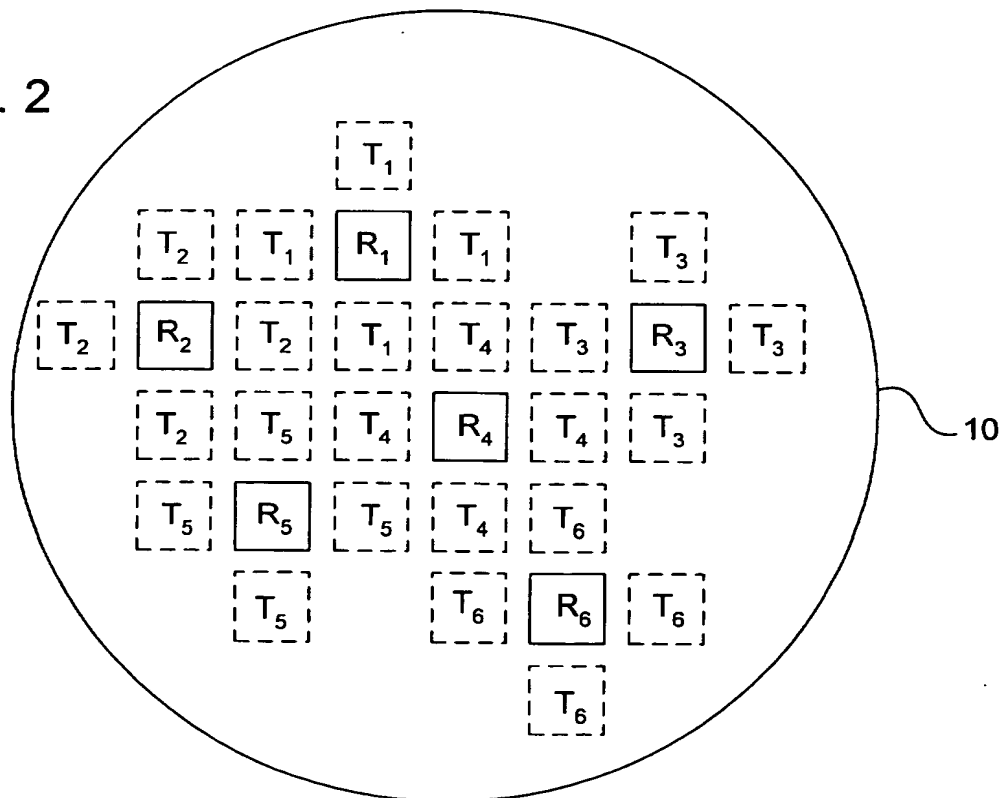


Fig. 3

